


# FiberConnect® High performance flex flat cable

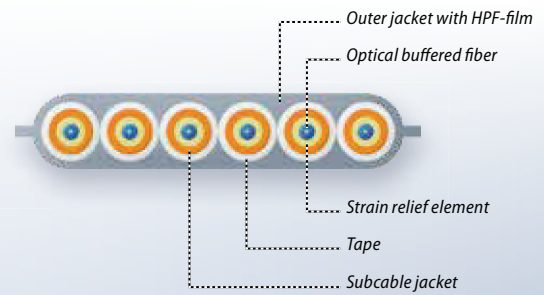

## HPF-FO-Cable n...

<b>Order no.</b>	<b>see table</b>
<b>Standardisation</b>	IEC 60794-2

### Description

Drag cable with maximum flexibility, low friction and low abrasion for applications in industrial clean rooms and in medical technology.

### Composition

Cable core	Several single fiber cables arranged in parallel with buffered fiber type TB600, non-metallic strain relief elements (Aramid) and TPE subcable jacket taped with ePTFE, diameter 1.6 mm
Cable jacket	HPF film
Colour of jacket	● grey

### Thermal properties

Transport/storage	- 25 °C to + 70 °C
Installation	- 5 °C to + 50 °C
Operating temperature	- 10 °C to + 60 °C

### Mechanical properties

Min. bending radius	dynamic	50 mm (over flat side)
---------------------	---------	------------------------

### Fire performance

No requirements.

Number of tubes	Total width	Weight	Order no.
	mm	kg/km	
4	10.0	20	84950772 <input type="checkbox"/>
6	14.0	30	84950773 <input type="checkbox"/>
8	19.0	40	84950774 <input type="checkbox"/>
12	27.0	60	84950776 <input type="checkbox"/>